


Cell Type 130125155Fe

Specification


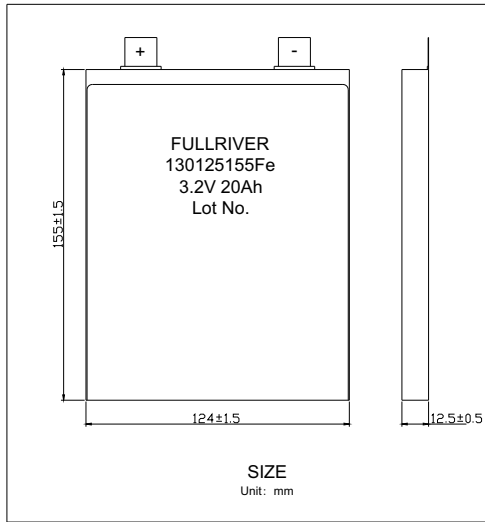


Nominal capacity		20Ah
Nominal voltage		3.2V
Charging method		Constant current/ constant voltage
Charging voltage		3.6V
Charging current	Standard	0.2C(4A)
	Maximum	1C(20A)
Charging time	Standard	5-6hrs.
	Rapid	1-1.5hrs.
Discharge current	Standard	0.2C(4A)
	Maximum	2C(40A)
Temperature	Operating	-20°C to +60°C
	Storage	-20°C to +50°C
Dimensions	Thickness	12.5mm
	Width	124.0mm
	Height	155.0mm
Weight		475g
Volumetric Energy Density		266Wh/l
Gravimetric Energy Density		134Wh/kg

Typical Characteristics

● Charge: 0.5 C CC/CV, 3.6 V, current 0.05C Cut-off, at 23±3°C

● Discharge: 0.5C CC, 2.0V cut-off, at 23±3°C

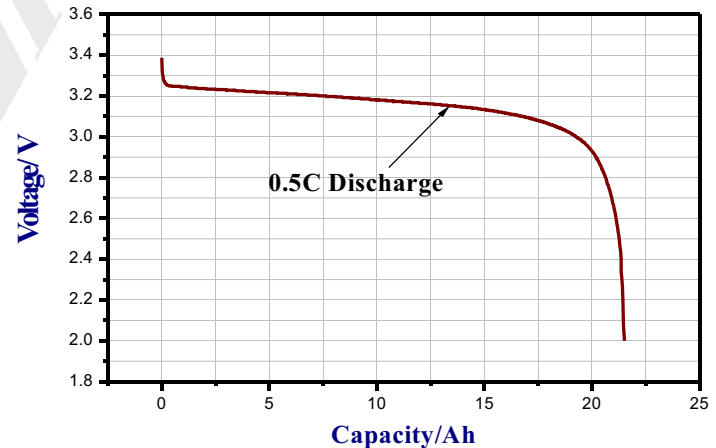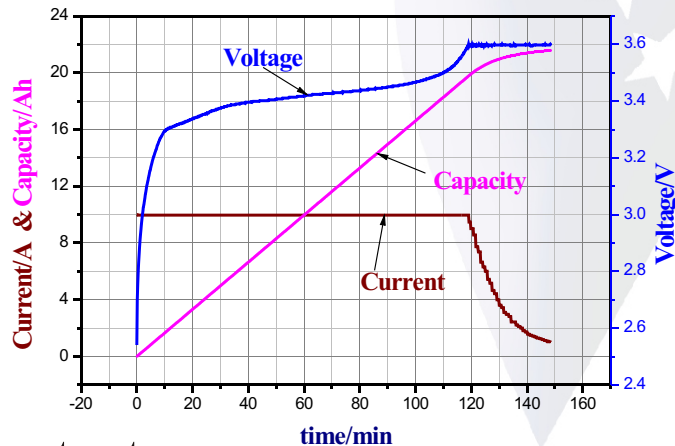

Contact us

Green Power Energy
Guangzhou Fullriver Battery New Technology Co., Ltd.

Email: sales@fentbattery.com
[Http://www.fentbattery.com](http://www.fentbattery.com)

Tel: +86-20-34925208
Fax: +86-20-34925229