


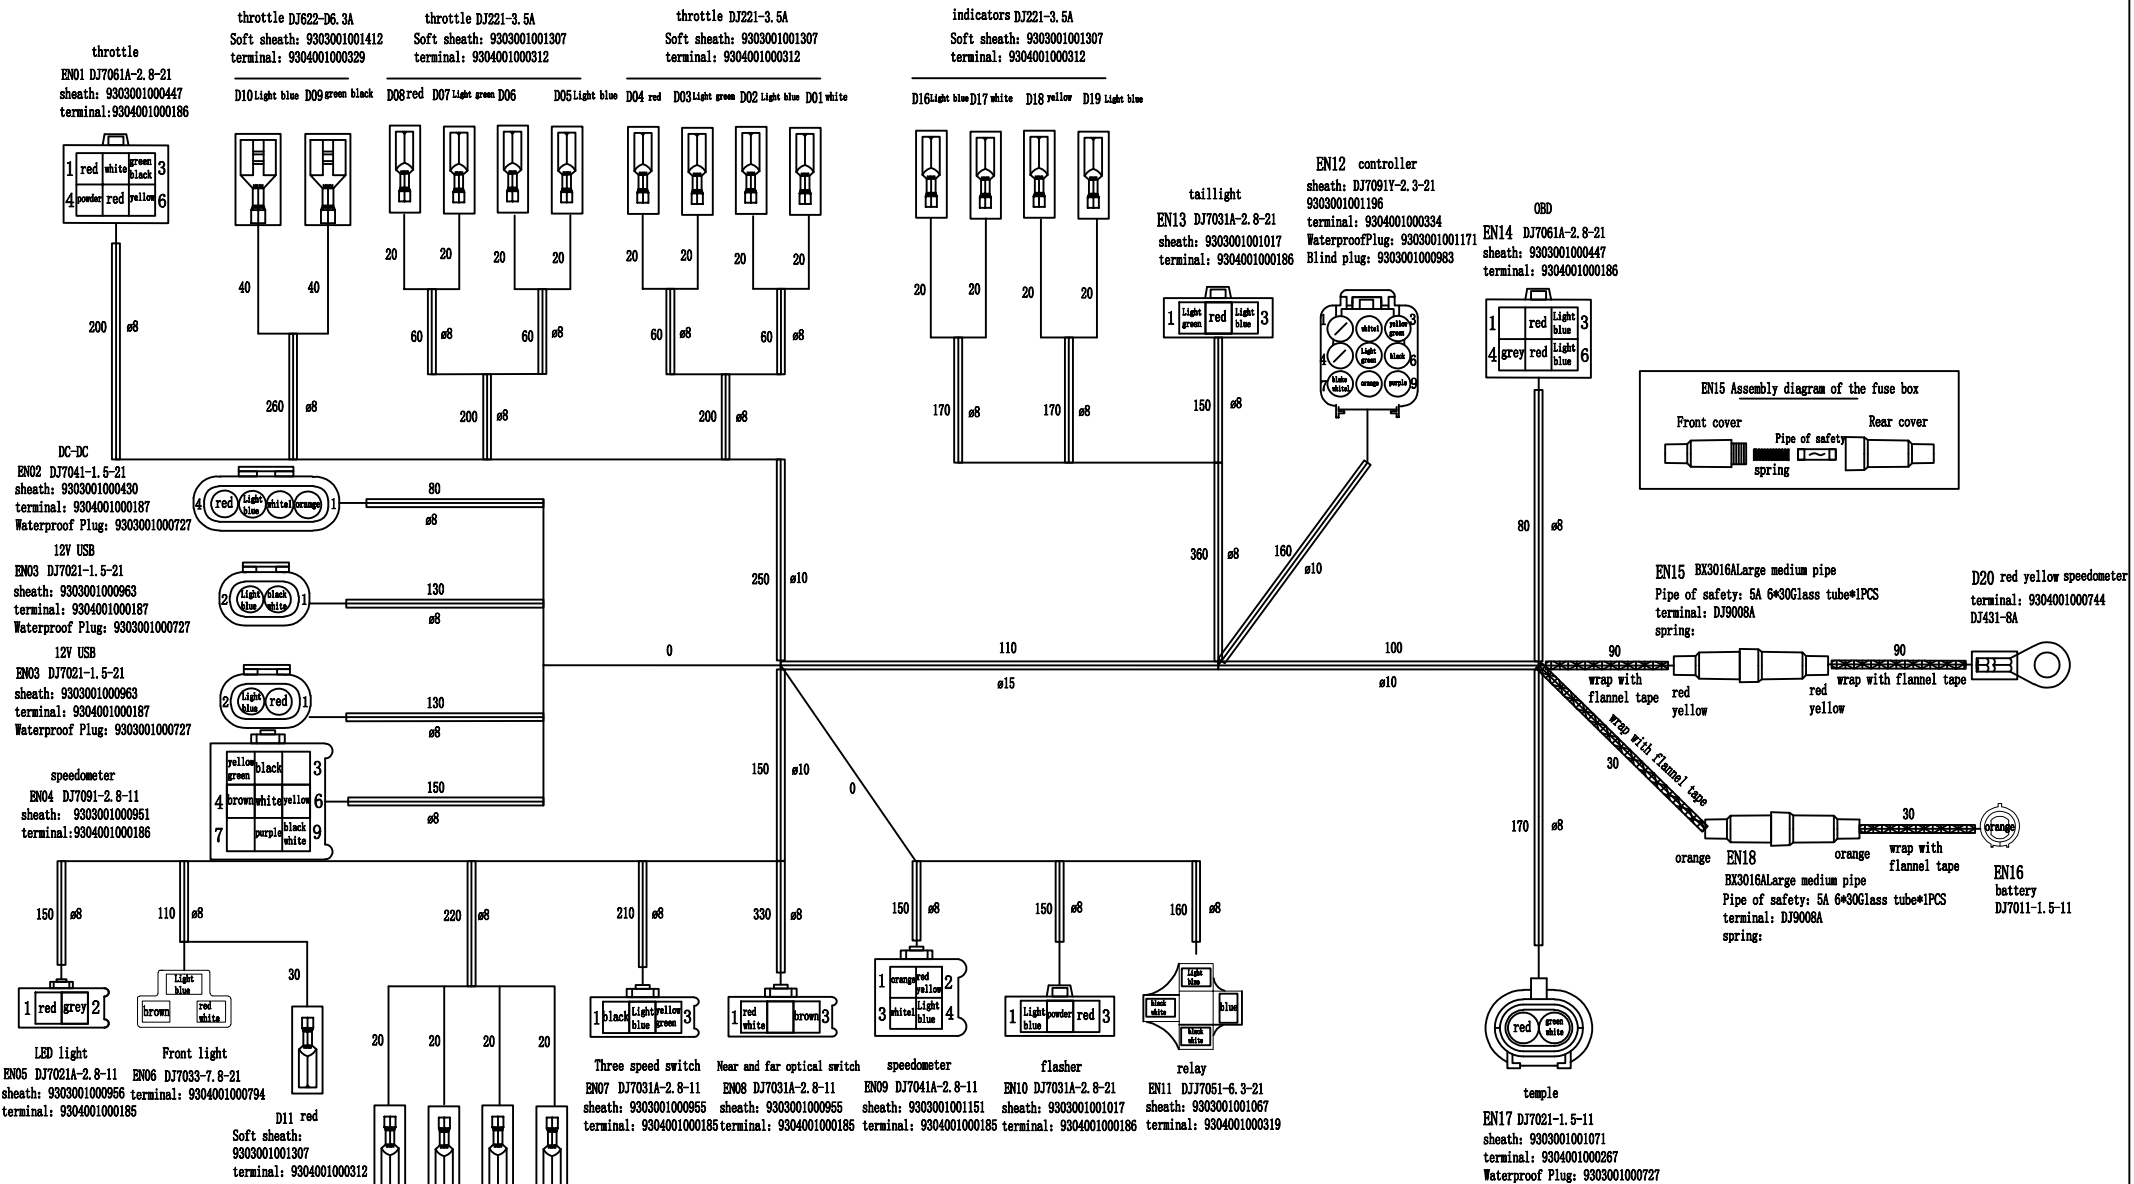

Technical Requirements:
1. Tightly wrapped PVC tape:
2. Duct tape tightly wrapped:
3. Flannelette tape tightly wrapped:
4. Closed bellows:
5. Closed-mouth PVC pipe:
6. PVC tape outside the open corrugated pipe is tightly wrapped:
7. The outer duct tape of the open corrugated pipe is tightly wrapped:
8. Self-winding pipe:
9. Fiberglass tube:
10. Snakeskin NMS:
11. Heat shrink tube:
12. FLRY-B cables are used when the wires are not specially marked.
13. The dimensions indicated are the distance between points or points and the end of the jacket
14. The view direction of the connector is the inbound end Wire entry end

Label Format 100*15mm

Family: Complete vehicle wiring harness Date: 2022-10-10
P/N: GERMANY0462- Vincent QX P/N: 9716008000***
Zhongshan QX Electric Co., Ltd. 000001

Remarks: All sleeves in the figure are wear-resistant textile sleeves, wrapped with flannelette tape

SIAECOSYS				Project Name			
Material Name		GERMANY0462- Vincent Complete vehicle wiring harness		Material No.		9716008000***	
Projection Angle of view		There is no		The weight of the	g	Number of pages	1 / 1
version	tag	content		design	audit	approval	Effective date
A0		A new edition					

Basic dimensions of wire harnesses	Deviation of limit(mm)			
	main	regional	protective casing	
≤200	+10	-10	+15	+10
>200~500	+10	-10	+15	-5
>500~1000	+20	-10	+20	+20
>1000	+20	-10	+20	-10